


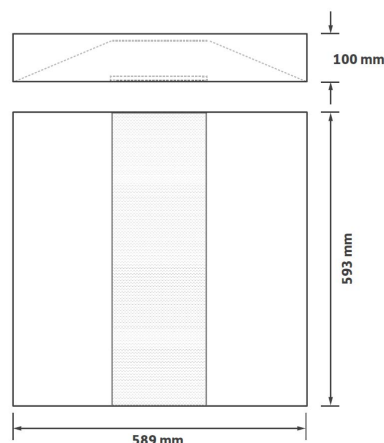

Developed to offer maximum flexibility with a focus on low UGR to aid LG7 compliance, wireless connectivity and tunable white, The AL-6368 is the perfect luminaire for demanding office, commercial and educational applications

KEY FEATURES

- Direct / indirect 600 x 600 LED modular
- Micro prismatic central diffuser
- Philips LED and driver combination
- L80/B10 70,000Hrs
- Low glare version for LG7 compliance
- No visible flicker (IEEE 1789 - 2015)
- Highly efficient ECA compliant versions
- High output version 5125 Llm
- Tridonic HCL tunable white version
- Wireless, dimming and emergency options
- Casambi dimming optional

Specification	
Power:	31.5W/32W/46W/52W
Voltage:	AC 220-240V
Work Temperature:	-25°C ~35°C/
Color Temperature:	3000K /4000K
CRI:	80
Weight:	3.9kg
IP Rate:	IP44 Front IP20 Rear
Warranty:	5 Years

Ordering Information				
Model No	Lumens	Power	Colour	Colour Temperature
AL-6368-001	2975	32W	830	3000K
AL-6368-002	3200	32W	840	4000K
AL-6368-003	3400	31.5W	830	3000K
AL-6368-004	3575	31.5W	840	4000K
AL-6368-005	4875	46W	830	3000K
AL-6368-006	5125	46W	840	4000K
AL-6368-TW	3875	52W	830-860	