



Specification

AL-AD55-6AG

Φ55 Super-slim Anti-glare Downlight

AL-AD55-6AG

If back and forth in the pool of downlights, seeking for one with best balance of quality, duration, value and cost, AL-AD55-6AG series is the one for choice.


AL-AD55-6AG series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



Super- slim Anti- glare Downlight

Dimension :

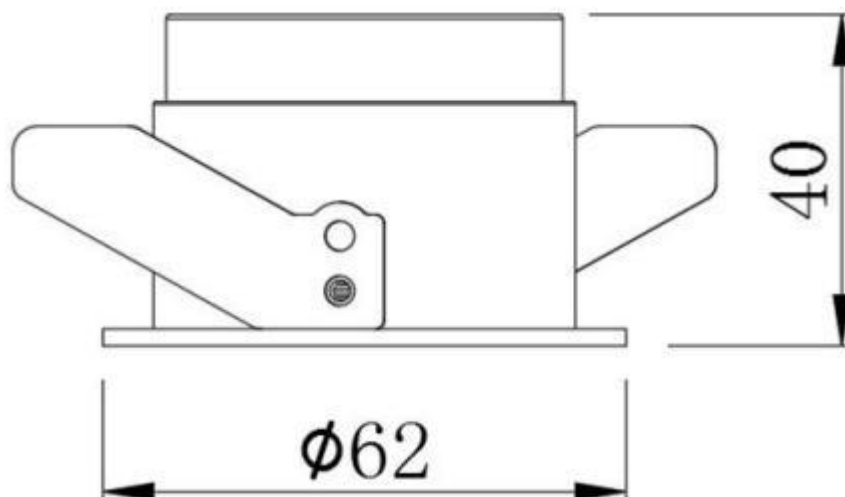

AL-AD55-6AG

Product parameters :

Input voltage	220V AC	LED Brand	EVERCORE
Power	6W	MacAdam	SDCM $\leq$ 5 step
Lumens	480LM	IP Code	IP20
CCT	2700K/3000K/3500K/4000K	IK Class	/
CRI	≥ 90	Adjustable	Yes
Beam angles	15° 、 24° 、 36°	Working temp	25°
Efficiency	80lm/w	Installation	Recessed
Housing	White (exterier) + Grey (cooling sink)	IES File	Yes
Dimmable	No Dimming	Lifetime(TM-21)	25000
Certificates	CE	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K/240 luminaires


Photoelectric parameters :

CCT	Lumens lm		
	15°	24°	36°
2700K± 125K	405	455	435
3000K± 150K	430	480	460
4000K± 250K	460	515	595

Remark :

- 1、the tolerance of output data can be vary up to 10% ;
- 2、the output data is typical value.

AAI Figure

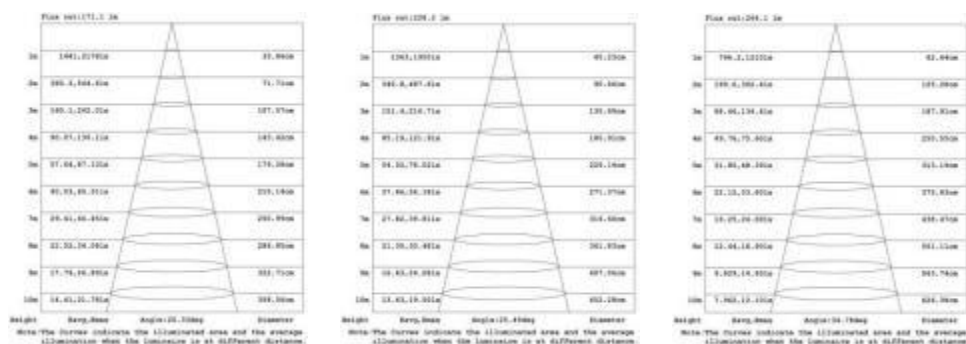

Luminous intensity distribution diagram

