



Specification

AL-AD75-12FI

Φ 75 Super-slim Fog-isolated Downlight

AL-AD75-12FI


If back and forth in the pool of downlights, seeking for one with best balance of quality,duration, value and cost, AL-AD75-12FI series is the one for choice.

AL-AD75-12FI series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



Super-slim Fog-isolated Downlight

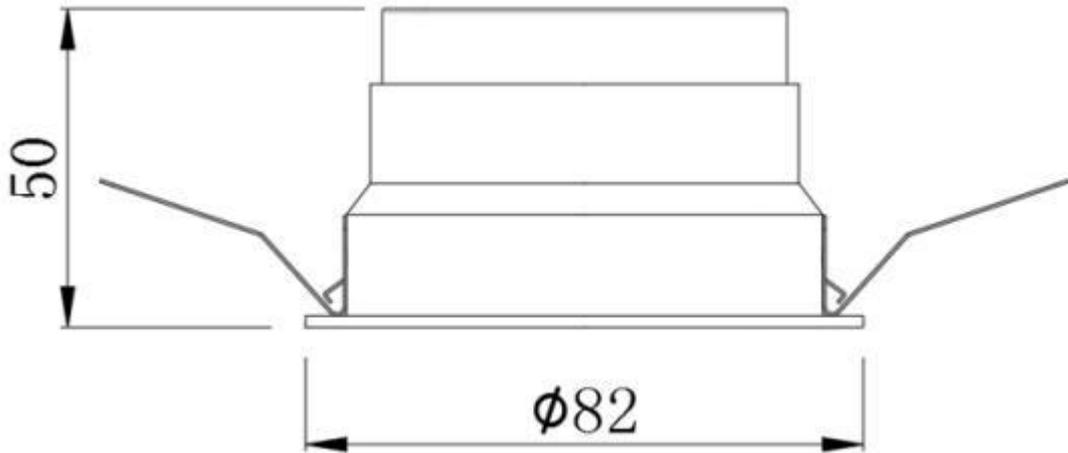Dimension :

AL-AD75-12FI
Product parameters :

Input voltage	220V AC	LED Brand	EVERCORE
Power	12W	MacAdam	SDCM ≤ 5 step
Lumens	480LM	IP Code	IP44
CCT	2700K/3000K/4000K	IK Class	/
CRI	≥ 90	Adjustable	Yes
Beam angles	Diffuser	Working temp	25°
Efficiency	50lm/w	Installation	Recessed
Housing	White (exterier) + Grey (cooling sink)	IES File	Yes
Dimmable	No Dimming	Lifetime(TM-21)	25000
Certificates	CE	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K luminaires


Photoelectric parameters :

CCT	Lumens lm
	Diffuser
2700K ± 125K	455
3000K ± 150K	480
4000K ± 250K	515

Remark :

- 1、 the tolerance of output data can be vary up to 10% ;
- 2、 the output data is typical value.

AAI Figure

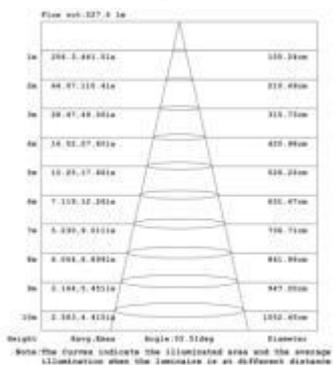

Luminous intensity distribution diagram

