

AL-LE2409



Features

DLS1.0, a special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.

1、 “Dots-free”lighting

Perfect homogenous lighting

2、 Bevelled light

Soft light,bevel lighting

3、 “Two” end caps

Two options of end cap for two ways of wire outgoing , Close-fitting design without screws makes installation much easier

4、 Various installation methods


A wide range of installation accessories wider applications

5、 “One” cut


Consistent length between diffuser and profile

6、 Smart control for unlimited possibilities

Perfectly match the profiles like customized, Control by hand sweep or touching



Details

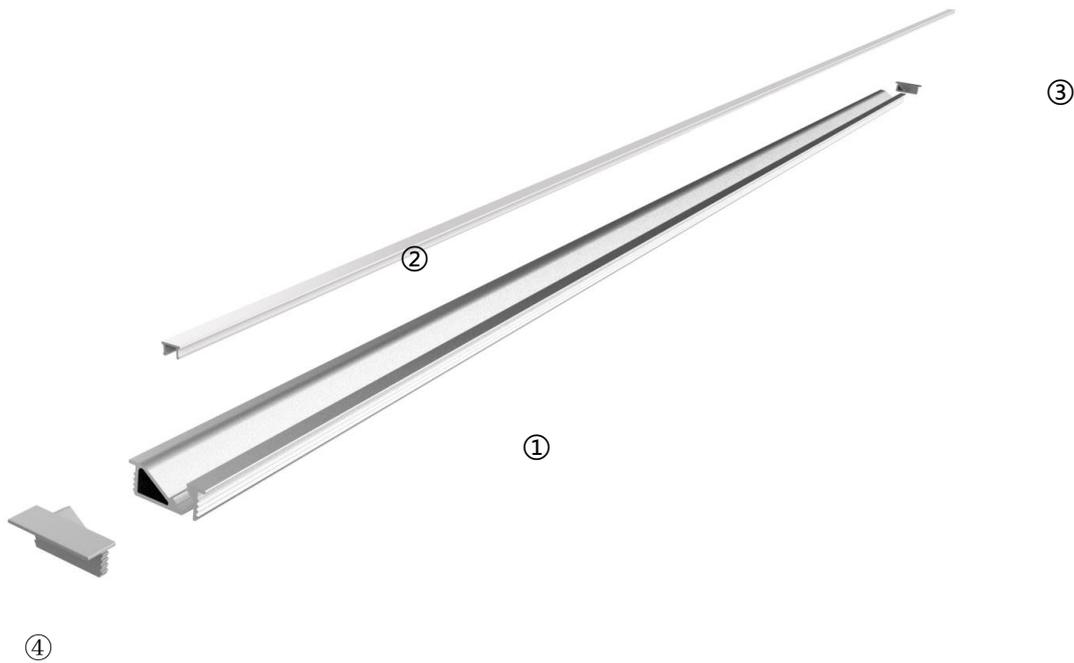

Standard Configuration

Picture	Item	Parameter	Model
	① Profile	Material: AL6063-T5 Profile weight: 0.45kg/2.5m Size: L2500*W23.8*H8.8mm Surface processing: Silver alkali sand oxidation film	/
	② Cover	Type: Frosted diffuse Material: PC Light transmittance: 60% Size: L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	③ End caps EC-LE2409FSS	Size: L23.8*W14*H8.8mm	AL-EC-LE2409
	④ End cap with hole EC-LE2409FSD	Size: L23.8*W14*H8.8mm	AL-EC-LE2409

Optical Parameter

D6140-24V-4mm driver, frosted diffuser

