




Specification	
Power:	6.5W/8W/10W
Voltage:	AC 220-240V
Work Temperature:	-25°C ~35°C -25°C ~25°C*
Color Temperature:	2700K/3000K/4000K
CRI:	80/90
Weight:	0.3g
IP Rate:	IP44 Front IP20 Rear
Warranty:	5 Years 2 Years Onsite

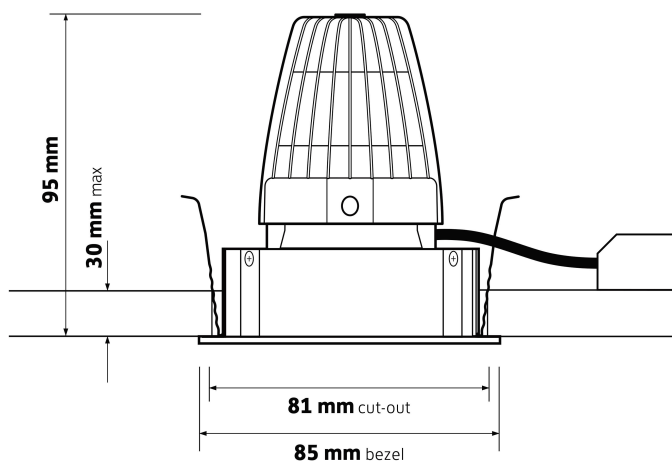

KEY FEATURES

- Low glare architectural downlight
- Discreet minimal bezel, die-cast from pure aluminium
- Matt black darklight baffle, developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsink
- Short circuit, overload and temperature protection
- Life >55,000 hours L90/F10

Ordering Information				
Model No	Lumens	Power	Colour	Colour Temperature
AL-6260-001-2.7K	600	8W	927	2700K
AL-6260-002-3K	675	6.5W	830	3000K
AL-6260-003-4K	700	6.5W	840	4000K
AL-6260-004-2.7K*	850	10W	927	2700K
AL-6260-005-3K*	850	8W	830	3000K
AL-6260-006-4K*	900	8W	840	4000K