



Specification

AL-AD80-15TR

Φ 80 Trimless Recessed Downlight

AL-AD80-15TR

If back and forth in the pool of downlights, seeking for one with best balance of quality, duration, value and cost, AL-AD80-15TR series is the one for choice.


AL-AD80-15TR series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



Trimless Recessed Downlight

Dimension :

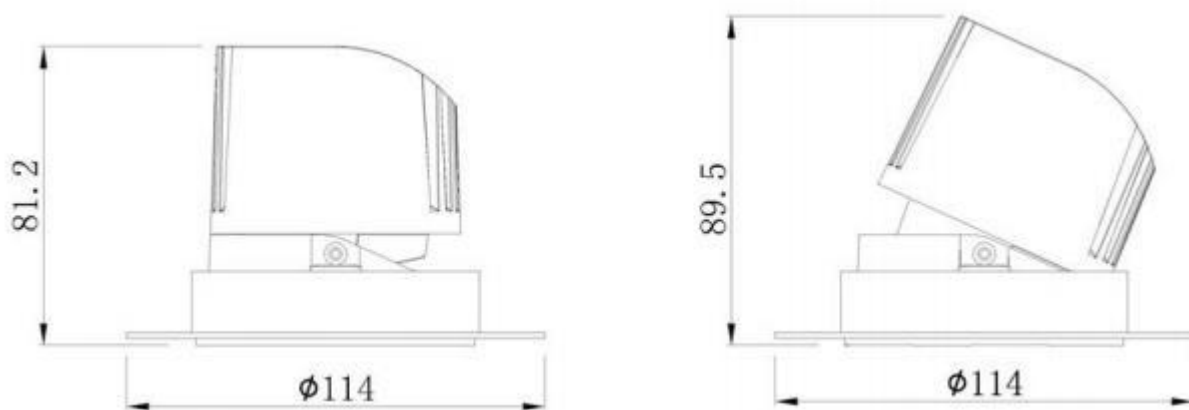

AL-AD80-15TR

Product parameters :

Input voltage	220V AC	LED Brand	EVERCORE
Power	15W	MacAdam	SDCM≤5 step
Lumens	1125LM	IP Code	IP20
CCT	2700K/3000K/3500K/4000K	IK Class	/
CRI	≥90	Adjustable	Yes
Beam angles	15° 、 24° 、 36° 、 50°	Working temp	25°
Efficiency	87lm/w	Installation	Trimless Recessed
Housing	White (exterier) + Grey (cooling sink)	IES File	Yes
Dimmable	No Dimming	Lifetime(TM-21)	25000
Certificates	CE	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K/240 luminaires


Photoelectric parameters :

CCT	Lumens lm (15W)			
	15°	24°	36°	50°
2700K± 125K	945	1065	1065	1065
3000K± 150K	1000	1125	1125	1125
4000K± 250K	1075	1210	1210	1210

Remark :

- 1、the tolerance of output data can be vary up to 10% ;
- 2、the output data is typical value.

AAI Figure

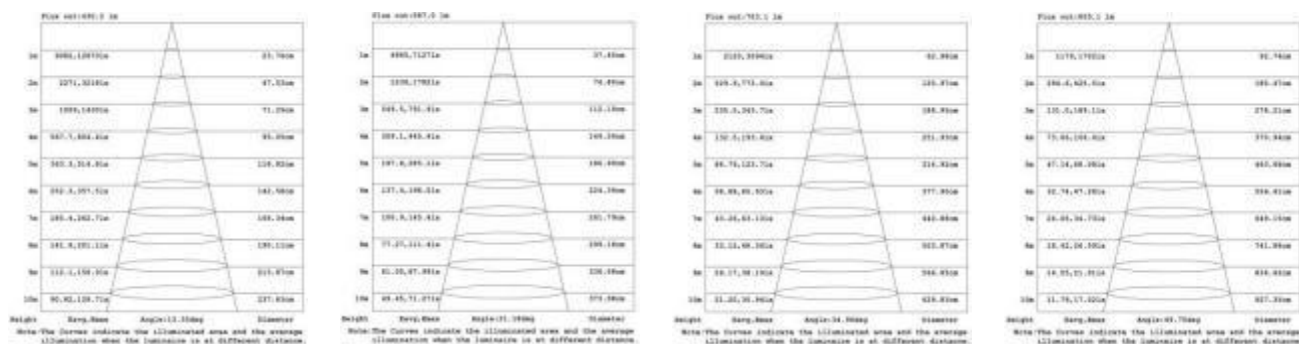


15°

24°

36°

50°

Luminous intensity distribution diagram

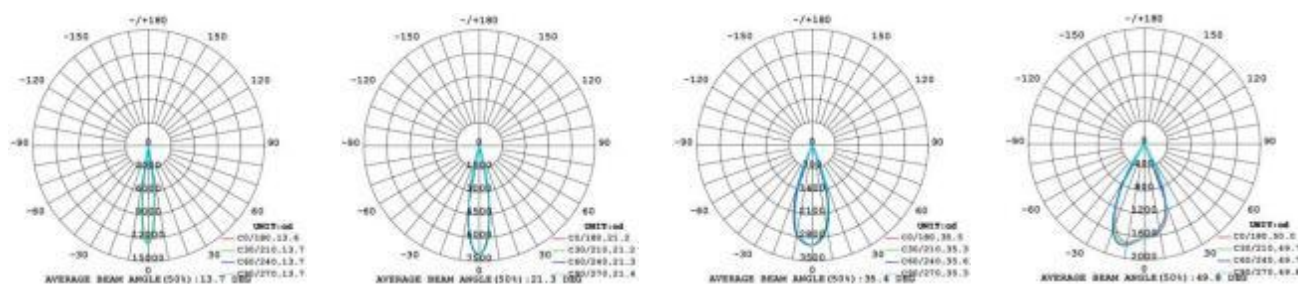

15°

24°

36°

50°