




Specification	
Input Voltage	220 -250 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
CRI	≥70,80,85
Life (H)	50000
Operating Temperature (°c)	-40 to 50
IP Rating	IP67
Warranty	5 Years

Physical Data	
Shape	RECTANGULAR
Colour	SILVER
Finish	DIE-CAST ALUMINIUM

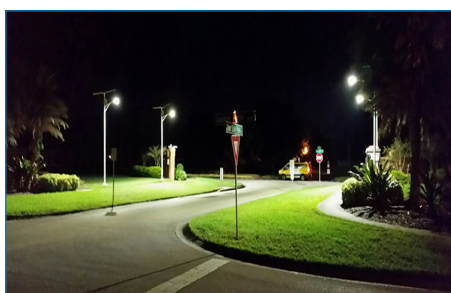

KEY FEATURES

- Photocell optional
- Upto 70% of energy savings
- 3G Vibration Compliance
- Easy Maintenance, Adjustable Entry
- IP67, 3000K and 4000K Optional
- IK08

Ordering Information						
Part Number	Power (W)	Lumen	Length (mm)	Width (mm)	Height (mm)	Colour Temp
AL-SLB-40	40	4147	463	345	116	4000
AL-SLB-80	80	8160	523	345	116	4000
AL-SLB-120	120	12362	583	345	116	4000
AL-SLA-30	30	3394	463	345	116	4000
AL-SLA-60	60	6902	523	345	116	4000
AL-SLA-90	90	8884	583	415	175	4000