





APPLICATION

Used in petrol station applications

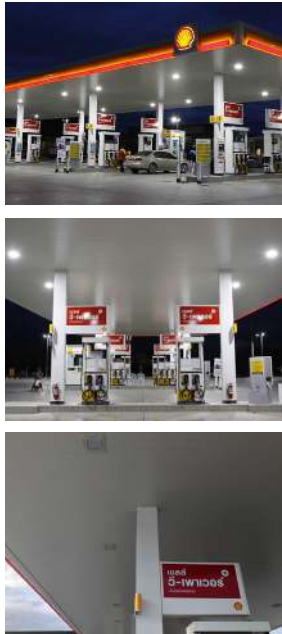

LAMP FEATURES

- Specialized light distribution design for gas station.
- Stable and reliable. Scientific convection design ensures great heat dissipation.
- Ceiling mounting and wall mounting optional. Easy for installation.
- Waterproof and impact resistant.

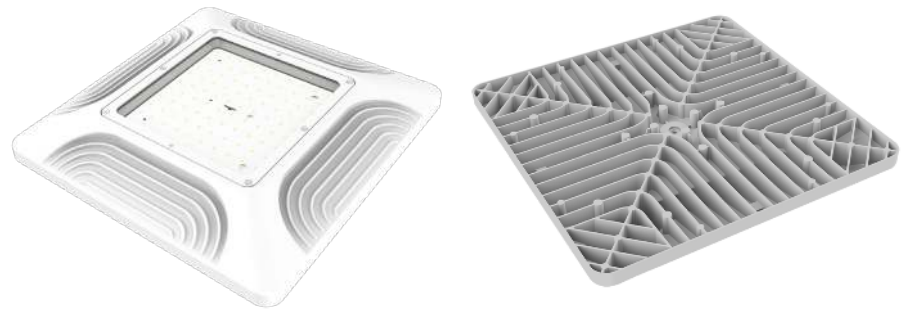

1. Lumen and luminous efficacy measurement tolerance is $\pm 5\%$.
2. Ra measurement tolerance is ± 2 .
3. Input voltage range is optional by using different drivers.
4. Surge Protection level is optional by using different drivers.


Major Parameter (Luminaries with Ra70)				
Model	AL-GSL-21AT-80W	AL-GSL-21AT-100W	AL-GSL-21AT-120W	AL-GSL-21AT-150W
Power,W	80	100	120	150
Luminous Flux ⁽¹⁾ , lm	10400	13000	15600	19500
Light Efficiency,lm/W	130			
CRI ⁽²⁾	Ra70			
Color Temperature,K	3000/4000/5000/5700/6500			
Beam Angle,°	120			
Input Voltage ⁽³⁾ ,V	100-277			
Frequency range,Hz	50/60			
Power Factor,PF	0.95			
Dimming	/			
Working Temperature,°C	-40~+50			
Housing Material	magnesium alloy			
Protection Class	IP65			
Impact Resistance Class	IK08			
Surge Protection ⁽⁴⁾ , kV	3.75			
Net Weight, kg	2.9	4.3	4.3	4.3
Gross Weight, kg	4.4	5.8	5.8	5.8
Package, mm	310×310×190mm	440×440×200mm	440×440×200mm	440×440×200mm
Warranty, years	5			

WARRANTY: 3 YEARS







CEILING MOUNTED TYPE EXPLODED VIEW

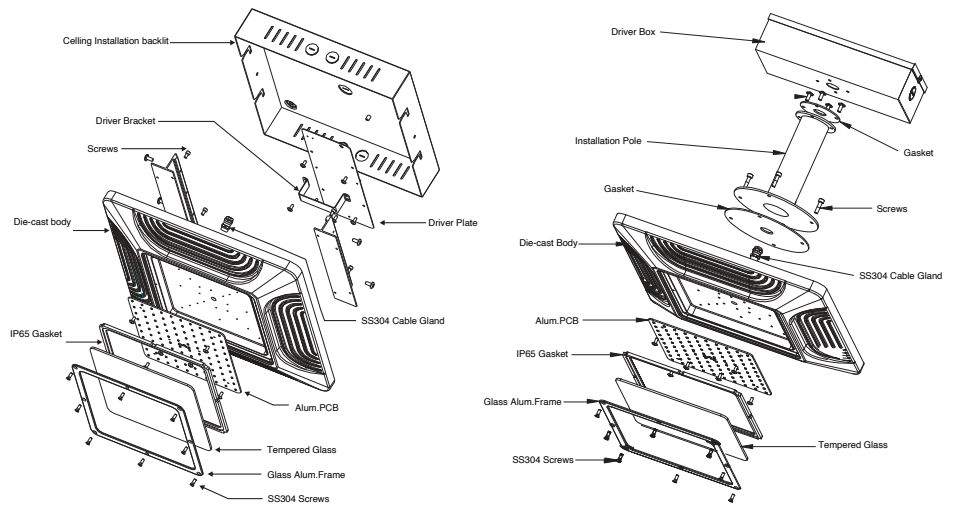


LIGHT DISTRIBUTION



SIZE

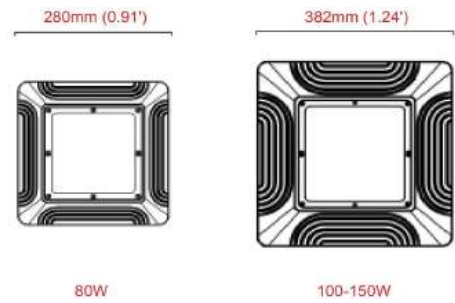

SIZE FOR DIFFERENT INSTALLATION

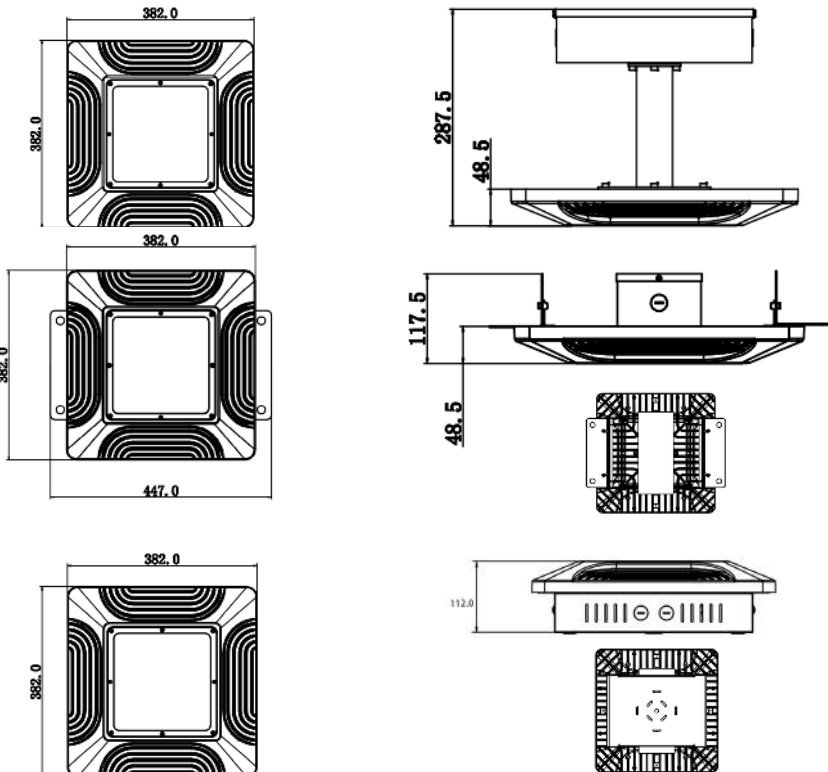


WARRANTY: 3 YEARS






INSTALLATION





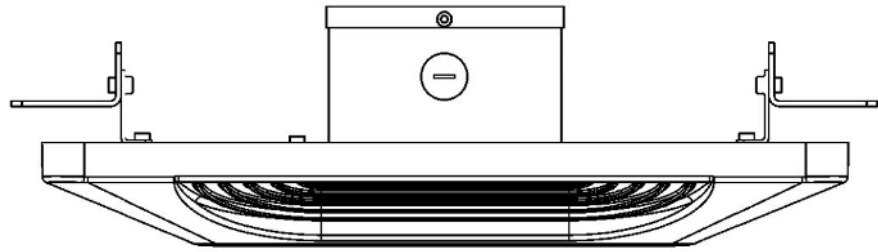


CEILING MOUNTING

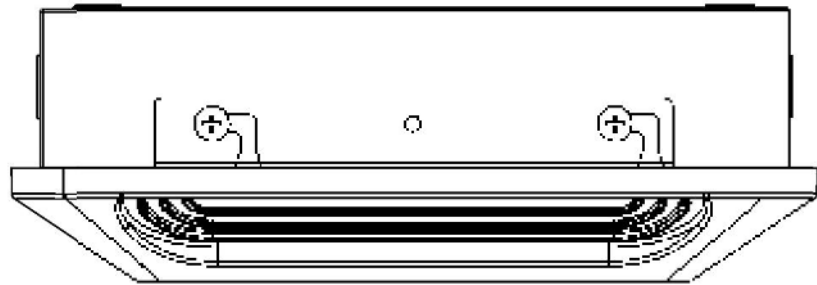

WALL MOUNTING

CEILING SURFACE MOUNTED INSTALLATION

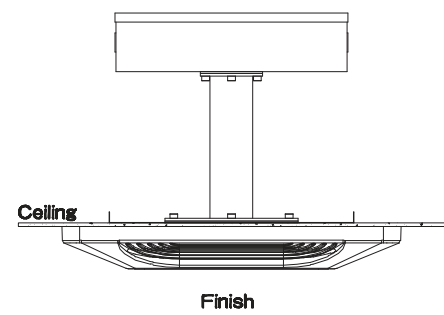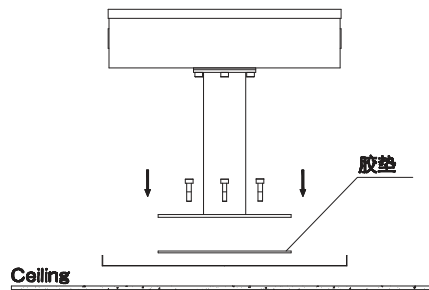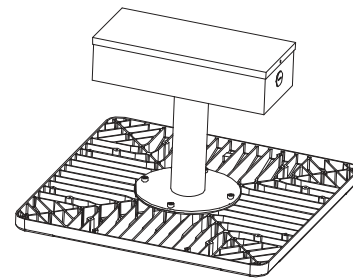



WARRANTY: 3 YEARS










RECESSED INSTALLATION

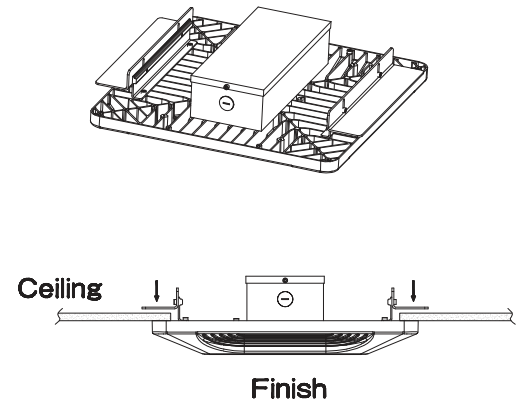

CEILING MOUNTED INSTALLATION

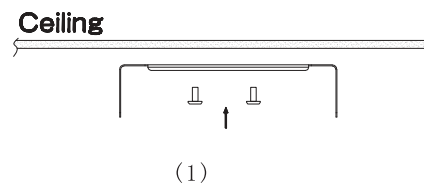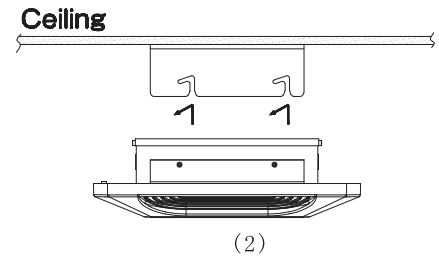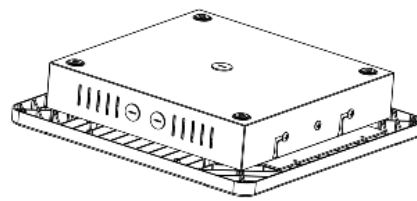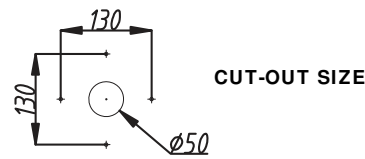

NOTE

Power must be cut off before the lamp is installed or the wires are connected.
 It's natural that the surface temperature would be higher to some extent during usage.
 Do not apply any external force on the lamp or intentionally drop it.
 LED canopy light should be stored in a cool, dry and clean place.
 Lamps used to be inside a solid grounding, reliable access to the user site grounding-system.
 For more information, please contact our sales supervisor.

Packing Details	
QTY/CTN:	1pcs/ctn
G.W.:	4kg/ctn
N.W.:	3.1kg/ctn
Size:	44*44*20cm/ctn



WARRANTY: 3 YEARS

