




Key Features

- ▶ Adaptable 600 x 600 LED illuminated modular
- ▶ Single IP44 window for linear and patterned lighting schemes
- ▶ Excellent uniform light distribution
- ▶ Tridonic LED and driver system for optimum performance
- ▶ Excellent efficacy to aid Part L compliance
- ▶ Dimming and emergency options
- ▶ Life >60,000 hours (L70 / F10) with a 5 year warranty
- ▶ Short circuit, overload and temperature protection
- ▶ White as standard, other colours available on request

Technical Drawing

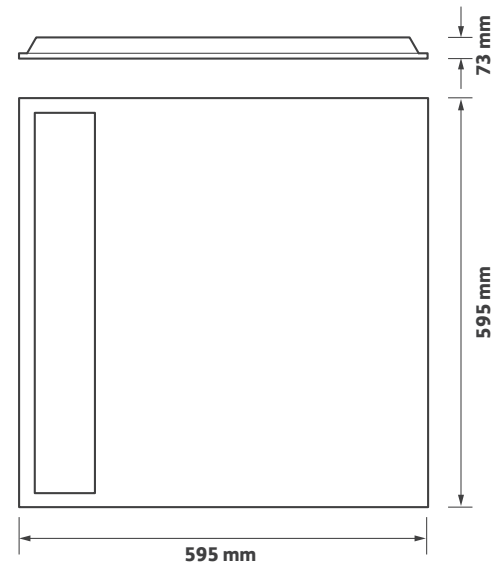

Ordering Information

Output	Power	Colour	Model Ref.
1150 lm	12 W	830	152.001
1150 lm	12 W	840	152.002
1400 lm	15 W	830	152.003
1400 lm	15 W	840	152.004
1825 lm	15 W	830	152.005
1825 lm	15 W	840	152.006
2100 lm	19 W	830	152.007
2100 lm	19 W	840	152.008
2325 lm	22 W	830	152.009
2325 lm	22 W	840	152.010

Options


Please select from the options below.

SwitchDIM, DALI or DSI	/ECO
EM conversion	/EM
Self-test EM conversion	/EMS
DALI EM conversion	/EMD
Single Point Connection to an ILEM product	/SPC


Contact sales for product variations




Options

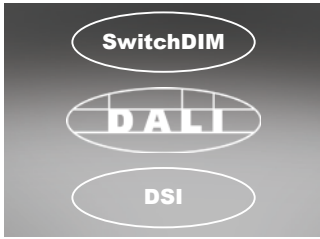


/ECO
SwitchDIM, DALI or DSI

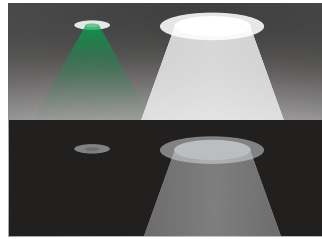


/EM
EM conversion

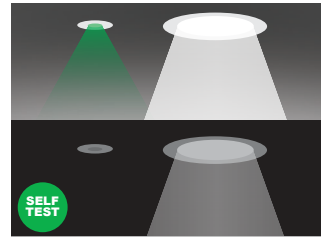

/EMS
Self-test EM conversion

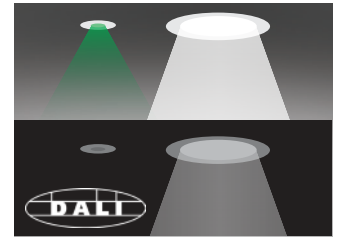

/EMD
DALI EM conversion



/SPC
Single Point Connection to ILEM
product