




Specification	
LED Light source	High Power LED
Light Color	WW, WWII
Material	SUS316
Optics	S20°/F60°
Power	1.3W
Power supply	24V
Dimension	D23X40
Weight	60g
IP Rating	IP68
Approvals	CE, RoHS, IP
Ambient temperature	-20°C ~ +45°C
Average life	50,000 Hrs
Accessories (optional)	Yes
Applications	Indoor /Outdoor /Landscape / Submersible

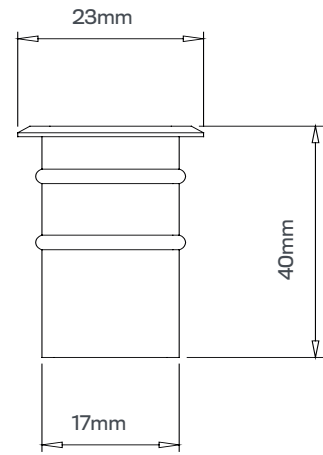

KEY FEATURES

Miniature recessed fixture complete with integral CREE LED Package and 20/60 degree beam options. Tempered glass with Ultra low-glare, IP68 ground light made of marine-grade 316 Stainless Steel. Product footprint of 23mm diameter ensures versatile application. Inline driver options include switched, 1-10V, DALi and AURASMART dimmable solutions.



Ordering Information			
Model No	LED Brand	Colour	Description
AL-GL012 WH4K	CREE	4000K	1W 20* GROUND IP68 316 24V 4000K
AL-GL012 WW3K	CREE	3000K	1W 20* GROUND IP68 316 3000K 24V
AL-GL012 RGB	EDISON	RGB	0.5W GROUND IP68 316 RGB12V

IP68

WARRANTY: 3 YEARS

