




Specification	
LED Light source	High Power LED
Light Color	RGB, CW, WW, NW
Material	SUS316
Optics	S20°/F60°
Power	3W
Power supply	24V
Dimension	76 x 76 x 47
Weight	N/A
IP Rating	IP68
Approvals	CE, RoHS, IP
Ambient temperature	-20°C ~ +45°C
Average life	50,000 Hrs
Accessories (optional)	Yes
Applications	Indoor /Outdoor /Landscape / Submersible

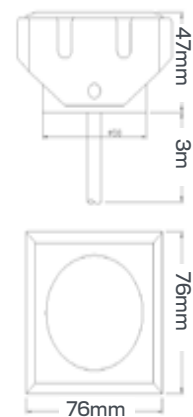

KEY FEATURES

Square recessed fixture complete with integral CREE LED package and 20/60 degree beam options. Tempered glass, marine-grade 316 Stainless Steel option with construction rated to IP68. Product footprint of 76mm diameter ensures a versatile application. Inline driver options include switched, 1-10V, DALi dimmable and AuraSmart compatible solutions.



Ordering Information			
Model No	LED Brand	Colour	Description
AL-GLO40SQ WW	CREE	3000K	3.5W 20/60* GROUND IP68 316 24V 316
AL-GLO40SQ NW	CREE	4000K	3.5W 20/60* GROUND IP68 316 24V 316
AL-GLO40SQ CW	CREE	6000K	3.5W 20/60* GROUND IP68 316 24V 316
AL-GLO40SQ RGB	CREE	RGB	3.5W 20/60* GROUND IP68 316 24V 316

IP68

WARRANTY: 3 YEARS

