




| Specification              |             |
|----------------------------|-------------|
| Input Voltage              | 220 -250 AC |
| Input Frequency (Hz)       | 50-60       |
| Drivers                    | INCLUDED    |
| Beam Angle                 | 110°        |
| CRI                        | ≥80         |
| Life (H)                   | 50000       |
| Operating Temperature (°c) | -25 to 60   |
| IP Rating                  | IP44        |
| Warranty                   | 5 Years     |

| Physical Data |           |
|---------------|-----------|
| Shape         | ROUND     |
| Colour        | WHITE     |
| Finish        | ALUMINIUM |

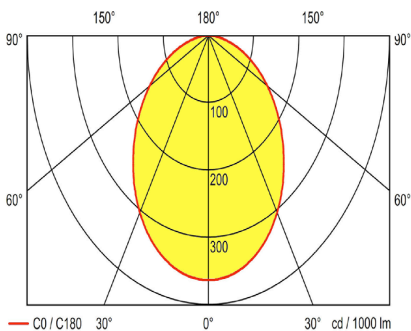

## KEY FEATURES

- Emergency / Dimming optional
- Upto 70% of energy savings
- 50,000 Hours life
- Epistar Chip
- 3000K, 4000K, 6000K optional
- ULTRA SLIM, IP40

| Ordering Information |           |       |             |             |            |             |
|----------------------|-----------|-------|-------------|-------------|------------|-------------|
| Part Number          | Power (W) | Lumen | Cutout (mm) | Height (mm) | Width (mm) | Colour Temp |
| AL-AERO-8W           | 8         | 720   | 125         | 30          | 145        | 4000        |
| AL-AERO-12W          | 12        | 1080  | 160         | 30          | 180        | 4000        |
| AL-AERO-15W          | 15        | 1350  | 225         | 30          | 240        | 4000        |
| AL-AERO-18W          | 18        | 1620  | 225         | 30          | 240        | 4000        |