




| Specification | |
|----------------------------|---------------|
| Input Voltage | 220 TO 250 AC |
| Input Frequency (Hz) | 50-60 |
| Drivers | INCLUDED |
| CRI | ≥80 |
| Beam Angle | 120° |
| Life (H) | 50000 |
| Operating Temperature (°c) | -25 to 35 |
| IP Rating | IP40 |
| Warranty | 5 Years |

| Physical Data | |
|---------------|---------------|
| Shape | LINEAR |
| Colour | WHITE |
| Finish | Polycarbonate |

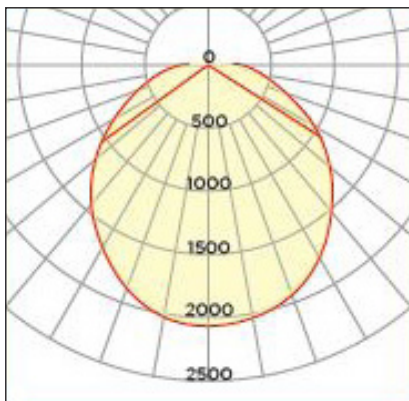

KEY FEATURES

- Upto 120 lm/w
- Upto 70% of energy savings
- LM80 Epistar Chipset·Surface/Suspension
- Polycarbonate Diffuser
- Dimmable and Emergency Optional
- Adjustable Wattages
- Osram Driver

| Ordering Information | | | | | | |
|----------------------|-----------|-------|------------|-------------|------------|-------------|
| Part Number | Power (W) | Lumen | Depth (mm) | Length (mm) | Width (mm) | Colour Temp |
| AL-COL2-24-1200 | 24 | 2880 | 87 | 1236 | 213 | 4000 |
| AL-COL2-36-1500 | 36 | 4320 | 87 | 1537 | 213 | 4000 |
| AL-COL2-45-1800 | 45 | 5400 | 87 | 1801 | 213 | 4000 |

IP40

WARRANTY: 5 YEARS

