




Specification	
Input Voltage	220 TO 240 AC
Input Frequency (Hz)	50-60
Drivers	OSRAM
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-25 to 50
IP Rating	IP40
Warranty	5 Years

Physical Data	
Shape	SQUARE
Colour	WHITE
Finish	STEEL

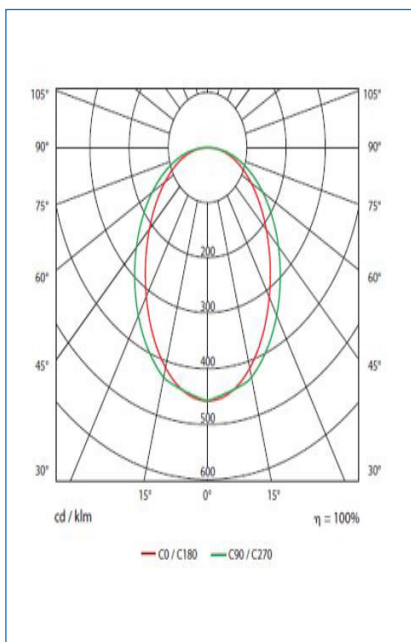

### KEY FEATURES

- Emergency/ Dimming Optional
- Single and Twin Diffuser optional
- Upto 70% of energy savings
- For 15-24MM exposed T Ceiling
- Epistar Chipset
- PMMA Diffuser
- Low Glare

Ordering Information					
Part Number	Power (W)	Lumen	Depth(mm)	Width (mm)	Colour Temp
AL-LAN-39-S-LED	39	3380	72	595	4000/5000
AL-LAN-39-T-LED	39	3490	72	595	4000/5000