




| Specification | |
|----------------------------|------------|
| Input Voltage | 120-277 AC |
| Input Frequency (Hz) | 50-60 |
| Drivers | INCLUDED |
| Beam Angle | 120° |
| CRI | ≥80 |
| Life (H) | 50000 |
| Operating Temperature (°c) | -25 to 50 |
| IP Rating | IP65 |
| Warranty | 5 Years |

| Physical Data | |
|---------------|---------------|
| Shape | RECTANGULAR |
| Colour | BLACK/WHITE |
| Finish | POLYCARBONATE |

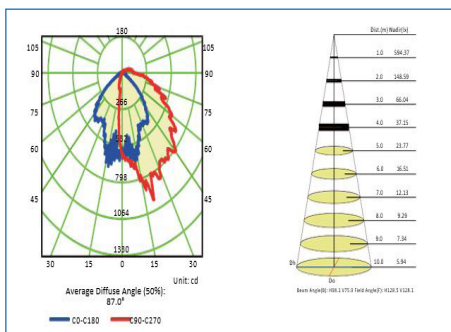

KEY FEATURES

- Photocell Optional
- Upto 70% of energy savings
- 50,000 Hours life
- DIE Cast Body
- 100 LM/W
- IP65

| Ordering Information | | | | | | |
|----------------------|-----------|-------|------------|-------------|------------|-------------|
| Part Number | Power (W) | Lumen | Depth (mm) | Height (mm) | Width (mm) | Colour Temp |
| AL-WALLPACK-17W-PC | 17 | 1700 | 90 | 213 | 139 | 5000 |
| AL-WALLPACK-17W | 17 | 1700 | 90 | 213 | 139 | 5000 |