




Specification	
Input Voltage	100-277 V AC
Input Frequency (Hz)	50-60
Drivers	MEANWELL
CRI	≥80
Life (H)	70000
Operating Temperature (°c)	-25 to 50
<b>IP Rating</b>	<b>IP65</b>
<b>Warranty</b>	<b>7 Years</b>

Physical Data	
Shape	LINEAR
Colour	WHITE
Finish	ANTI CORROSIVE

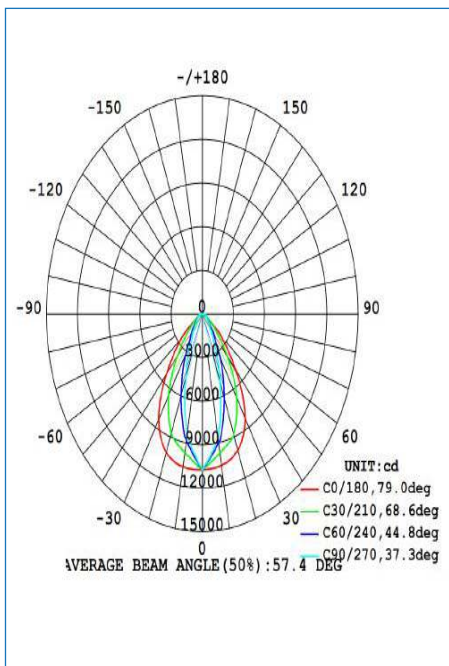

### KEY FEATURES

- 40X80 / 55X130 / 30X70 / 30X100 / 70X70 Beam Angle
- Upto 70% of energy savings
- Thermal Management
- Microwave Motion Sensor Available
- Anti-Corrosion coating surface
- Dimmable and Emergency Optional
- 140 LM/W
- 3000k, 4000k, 6000k optional
- IP65

Ordering Information						
Part Number	Power (W)	Lumen	Depth (mm)	Length (mm)	Width (mm)	Colour Temp
AL-LIN-90	90	12600	90	686	190	5000
AL-LIN-120	120	16800	90	686	190	5000
AL-LIN-150	150	21000	90	986	190	5000
AL-LIN-180	180	25200	90	986	190	5000
AL-LIN-210	210	29400	90	1286	190	5000
AL-LIN-240	240	33600	90	1286	190	5000