




### Features

- ▶ Maintained or non-maintained operation
- ▶ 15 x High intensity LEDs for bright, even illumination of legend
- ▶ Double sided acrylic legend panels conform to requirements of EU signs directive
- ▶ Wire suspension adjustable to 1.5 m drop
- ▶ Compact lamp / gear housing compared with conventional light sources
- ▶ Self-test version available

### Technical Drawing

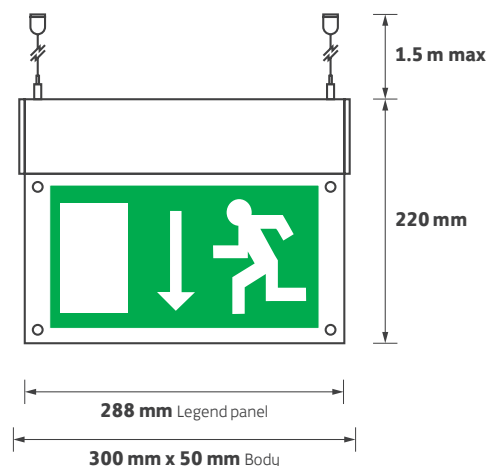

### Ordering Information

Bezel Finish	Rated Duration	Recharge Time	Typical Lifetime	Model Ref.
Brushed Aluminium	3 hr	24 hr	50,000 hr	<b>LXS004</b>

### Options

Please select from the options below.

Self-test upgrade	<b>/S</b>
Reversible left / right legend	<b>LXSLR</b>

