




Specification	
Power:	6W/9W/15W/25W
Voltage:	DC24V (AL-SP9) AC100~240V 50/60Hz (AL-SP6 RGB, AL-SP15, AL-SP25)
Work Temperature:	-2 0~60°C
Color Temperature:	2700K~6500K
Luminous Flux:	AL-SP6 = 420LM, AL-SP9 = 700LM, AL-SP15 = 1200LM, AL- SP25 = 1700LM
Luminous Efficiency:	AL-SP6 = 70LM/W , AL-SP9 = 80LM/W, AL- SP15 = 80LM/W, AL-SP25 = 70LM/W
CRI:	
Lifespan:	
Beam Angle:	AL-SP9 , AL- SP15, AL-SP25 = 15° AL-SP6 = 25°
Illumination distance:	AL-SP9, AL- SP15, AL-SP6 = >10m AL-SP25 = 15m
IP Rate:	IP66
RF:	2.4GHz
Transmitting power:	6dBm
Control Distance:	30m

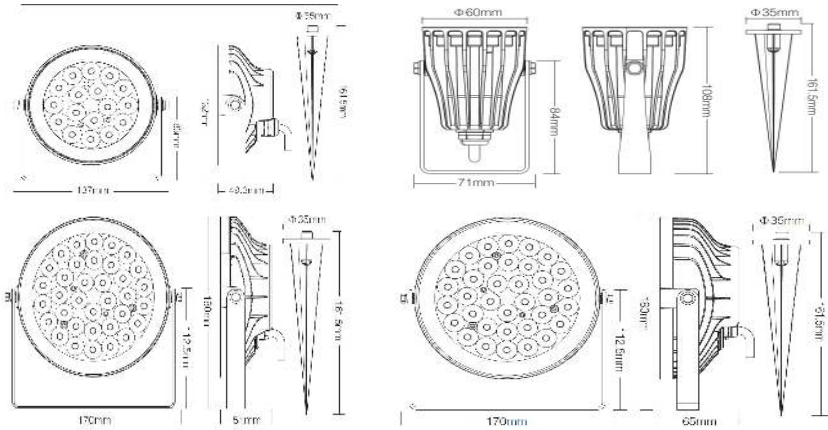

### KEY FEATURES

- 2.4GHz Remote and smartphone app controllable.
- Supports third party voice control such as Alexa.
- 16 million colours to choose from, CCT, brightness and saturation controllable. Signal transmitting and mode synchronisation.

Ordering Information	
Model No	Description
AL-SP6 RGB-CCT	6W SPIKE RGB-CCT
AL-SP9 RGB-CCT	9W SPIKE/SPOT RGB-CCT
AL-SP15 RGB-CCT	15W SPIKE/SPOT RGB-CCT
AL-SP25 RGB-CCT	25W SPIKE/SPOT RGB-CCT



IP66

WARRANTY: 3 YEARS

