




Specification	
Input Voltage (V)	220-240
Input Frequency (Hz)	50-60
Drivers	TRIDONIC
CRI (Ra)	80
Life (H)	>60000 (L80/F10)
Operating Temperature (°c)	-25 to +35
IP Rating	IP20/54
Warranty (yrs)	3

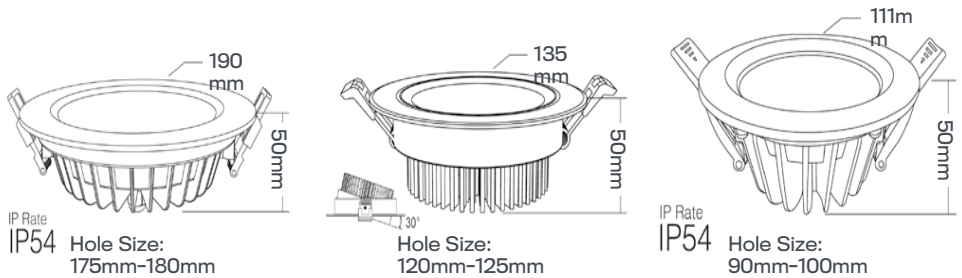

## KEY FEATURES

### IP20/54 DOWNLIGHT

Smart water-resistant downlights 2.4GHz RF remote controllable, control distance within 30 meters Dimmable & colour temperature adjustable colour changing & saturation. Can be controlled with a Smartphone APP control, long-distance control (2.4GHz gateway is required) Support third party voice control such as Alexa (2.4GHz gateway is required). There is also a tiltable version available AL-DLIP9T



Ordering Information	
Model No	Description
AL-DLIP6 RGB-CCT	6W IP54 DOWNLIGHT
AL-DLIP15 RGB-CCT	15W IP54 DOWNLIGHT
AL-DLIP9T RGB-CCT	9W IP20 RGB-CCT TILT