




Specification	
Input Voltage	220 -250 AC
Input Frequency (Hz)	50-60
Drivers	ICLUDDED
CRI	≥70,80,85
Life (H)	50000
Operating Temperature (°c)	-40 to 50
IP Rating	IP67
Warranty	5 Years

Physical Data	
Shape	RECTANGULAR
Colour	SILVER
Finish	DIE-CAST ALUMINIUM

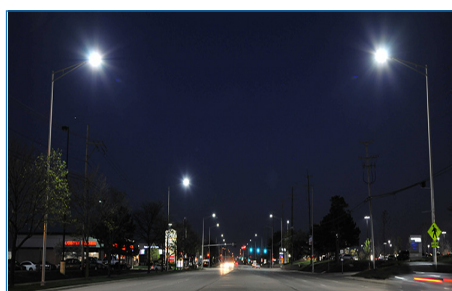

KEY FEATURES

- Photocell optional
- Upto 70% of energy savings
- 3G Vibration Compliance
- Easy Maintenance, Adjustable Entry
- IP67, 3000K and 4000K Optional
- IK08

Ordering Information						
Part Number	Power (W)	Lumen	Length (mm)	Width (mm)	Height (mm)	Colour Temp
AL-SKB-40	40	4147	626	270	99	4000
AL-SKB-80	80	8160	626	270	99	4000
AL-SKB-120	120	12362	626	270	99	4000
AL-SKA-30	30	3394	626	270	99	4000
AL-SKA-60	60	6902	626	270	99	4000
AL-SKA-90	90	8884	626	270	99	4000