

PRO Series Specification



PROSTRIPCOB

24V-8mm





【General description】

- Light line and dot-free with big emitting angle
- CRI>90,100LM/W,1000LM/M
- Easy installation and maintaining
- 7 optional 2700K/3000K/4000K/6500K/R/G/B

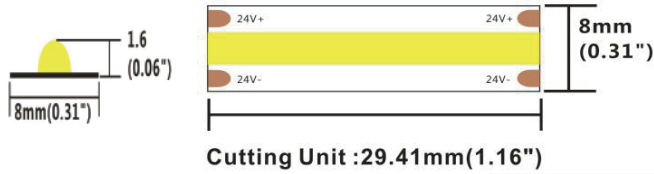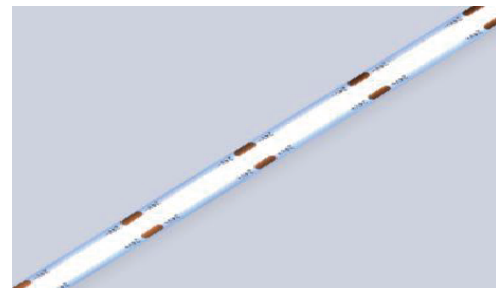

【Dimension】


- Input voltage: DC24V
 CRI: 90
 Max.power: 11.2W(1m)
 Power range: 8.8~11.2W(1m)
 Rated current: 0.42A(1m) 1.8A(5m)
 Typical Power: 10W(1m) 43.2W(5m)
 tape IP: IP20/IP67
 On-off times: 10000 (test times)
 Warranty: 5years
 (Warranty is based on indoor use)
- Max.length: 5000mm(16.4')
 Cutting unit: 29.41mm(1.16")
 LED pitch: /
 Min. bend diameter: Φ 60mm(2.36")
 Mounting: 3M tape
 Copper foil: 2oz



【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	SW	2700K	820	250	82	/
Ra>90	WW	3000K	900	274	90	/
Ra>90	NW	4000K	980	298	98	F
Ra>90	W	6500K	1000	304	100	F
/	R	620-630nm	65	19	7	/
/	G	515-520nm	1190	362	126	/
/	B	465-470nm	85	25	8	/

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/lmerter , data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

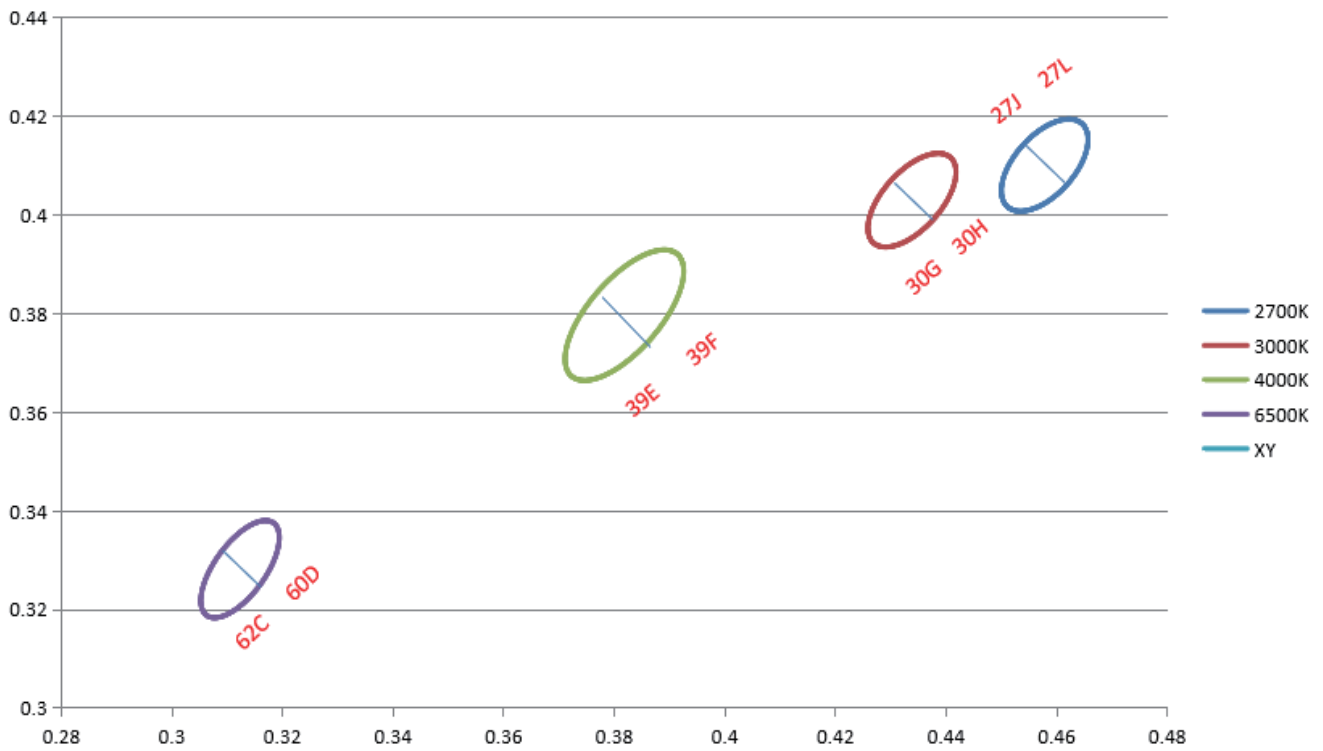

[IP process information]

