




Specification	
Power:	13W/16W/120W
Voltage:	AC 220-240V
Work Temperature:	-25°C ~25°C/
Color Temperature:	2700K/3000K/ 4000K
CRI:	80/90
Weight:	1.1kg
IP Rate:	IP44 Front IP20 Rear
Warranty:	5 Years

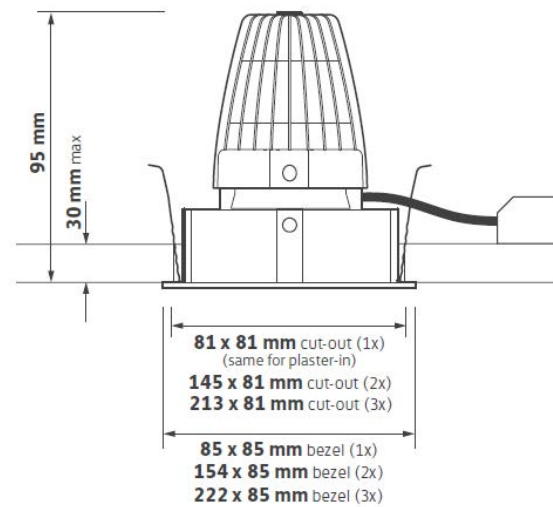

KEY FEATURES

- Low glare architectural downlight
- Discreet minimal bezel, die-cast from pure aluminium
- Matt black darklight baffle, developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsink
- Short circuit, overload and temperature protection
- Life >55,000h L90/F10

Ordering Information				
Model No	Lumens	Power	Colour	Colour Temperature
AL-6264-301-2.7K	1800	24W	927	2700K
AL-6264-302-3K	2025	19.5W	830	3000K
AL-6264-303-4K	2100	19.5W	840	4000K
AL-6264-304-2.7K	2550	30W	927	2700K
AL-6264-305-3K	2550	24W	830	3000K
AL-6264-306-4K	2700	24W	840	4000K