



Specification

AL-AD45-6R

Φ45 Recessed Downlight

AL-AD45-6R

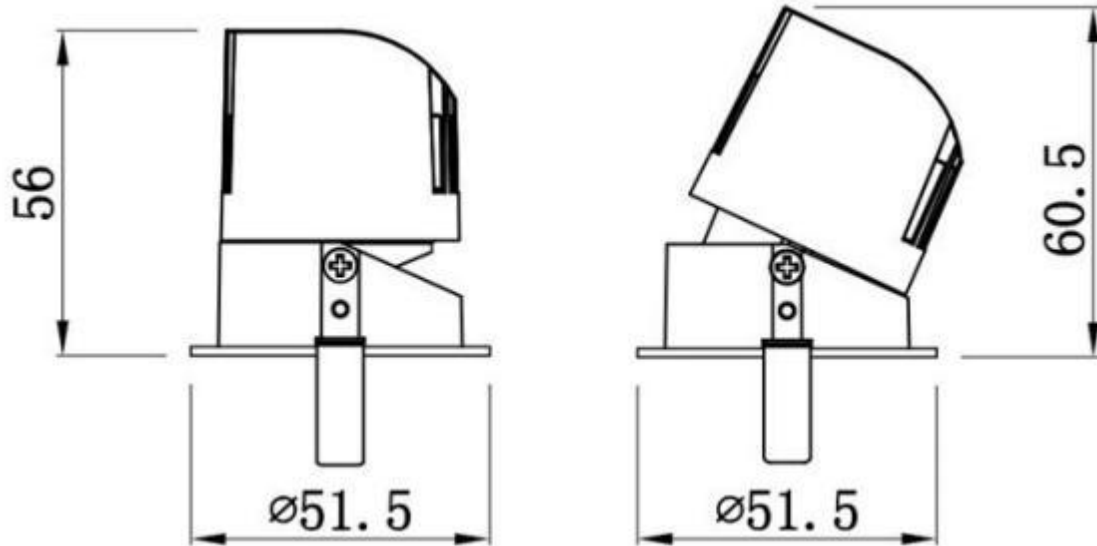
If back and forth in the pool of downlights, seeking for one with best balance of quality, duration, value and cost, AL-AD45-6R series is the one for choice.

AL-AD45-6R series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



Recessed Downlight

Dimension :

AL-AD45-6R
Product parameters :

Input voltage	220V AC	LED Brand	EVERCORE
Power	6W	MacAdam	SDCM \leq 5 step
Lumens	390LM	IP Code	IP20
CCT	2700K/3000K/3500K/4000K	IK Class	/
CRI	\geq 90	Adjustable	Yes
Beam angles	15°、24°、36°	Working temp	25°
Efficiency	65lm/w	Installation	Recessed
Housing	White (exterier) + Grey (cooling sink)	IES File	Yes
Dimmable	No Dimming	Lifetime(TM-21)	25000
Certificates	CE	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K/240luminaires

Photoelectric parameters :

CCT	Lumens lm		
	15°	24°	36°
2700K± 125K	370	370	370
3000K± 150K	390	390	390
4000K±250K	420	420	420

Remark :

- 1、 the tolerance of output data can be vary up to 10% ;
- 2、 the output data is typical value.

AAI Figure

