



# Specification

AL-AD95-18AG

# Φ95 Super-slim Anti-glare Downlight

## AL-AD95-18AG


If back and forth in the pool of downlights, seeking for one with best balance of quality, duration, value and cost, AL-AD95-18AG series is the one for choice.

AL-AD95-18AG series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



**Super-slim Anti-glare Downlight**

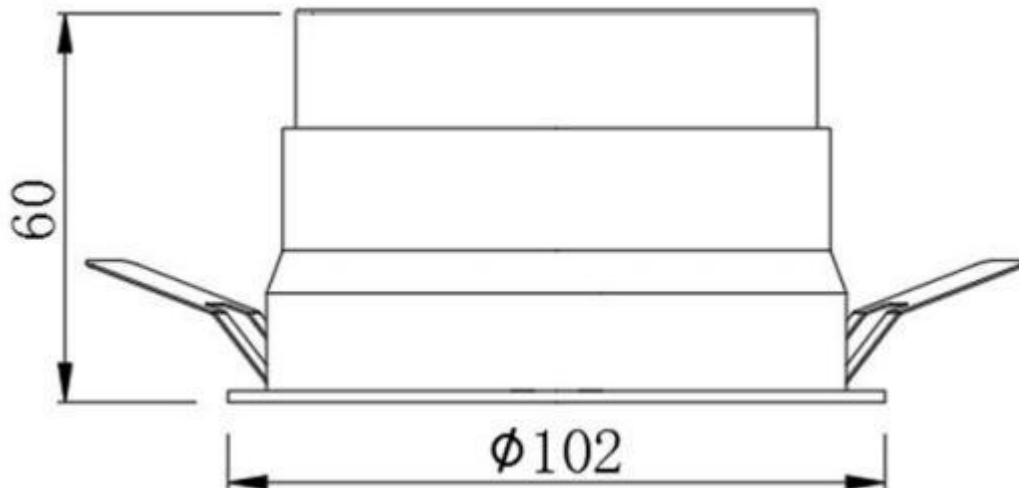**Dimension :**

**AL-AD95-18AG**
**Product parameters :**

<b>Input voltage</b>	220V AC	<b>LED Brand</b>	EVERCORE
<b>Power</b>	18W	<b>MacAdam</b>	SDCM≤5 step
<b>Lumens</b>	1350LM	<b>IP Code</b>	IP20
<b>CCT</b>	2700K/3000K/3500K/4000K	<b>IK Class</b>	/
<b>CRI</b>	≥90	<b>Adjustable</b>	Yes
<b>Beam angles</b>	15°、24°、36°	<b>Working temp</b>	25°
<b>Efficiency</b>	85lm/w	<b>Installation</b>	Recessed
<b>Housing</b>	White (exterier) + Grey (cooling sink)	<b>IES File</b>	Yes
<b>Dimmable</b>	No Dimming	<b>Lifetime(TM-21)</b>	25000
<b>Certificates</b>	CE	<b>Warranty</b>	3 years

**Remark :**

- 1、 The output data is based on the testing result of 3000K/240 luminaires


## Photoelectric parameters :

CCT	Lumens lm		
	15°	24°	36°
2700K± 125K	1230	1280	1260
3000K± 150K	1300	1350	1330
4000K± 250K	1395	1450	1430

### Remark :

- 1、 the tolerance of output data can be vary up to 10% ;
- 2、 the output data is typical value.

### AAI Figure

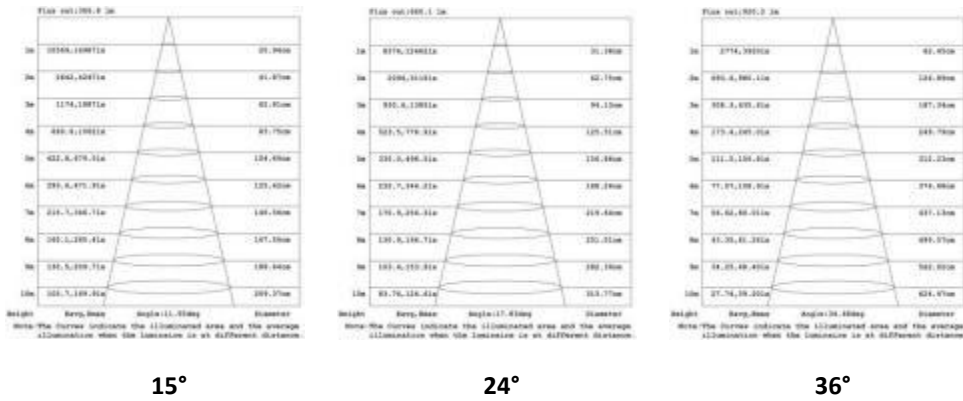

### Luminous intensity distribution diagram

