



Specification

AL-AD95-25R

Φ 95 Recessed Downlight

AL-AD95-25R

If back and forth in the pool of downlights, seeking for one with best balance of quality,duration, value and cost, AL-AD95-25R series is the one for choice.


AL-AD95-25R series, delicate and functional, without fancy outlook or any redundant configuration, is cool and casual to catch eyes.

Like rising sun, shines its brilliance, it is an ideal choice for residential, commercial and hotel applications.



Recessed Downlight

Dimension :

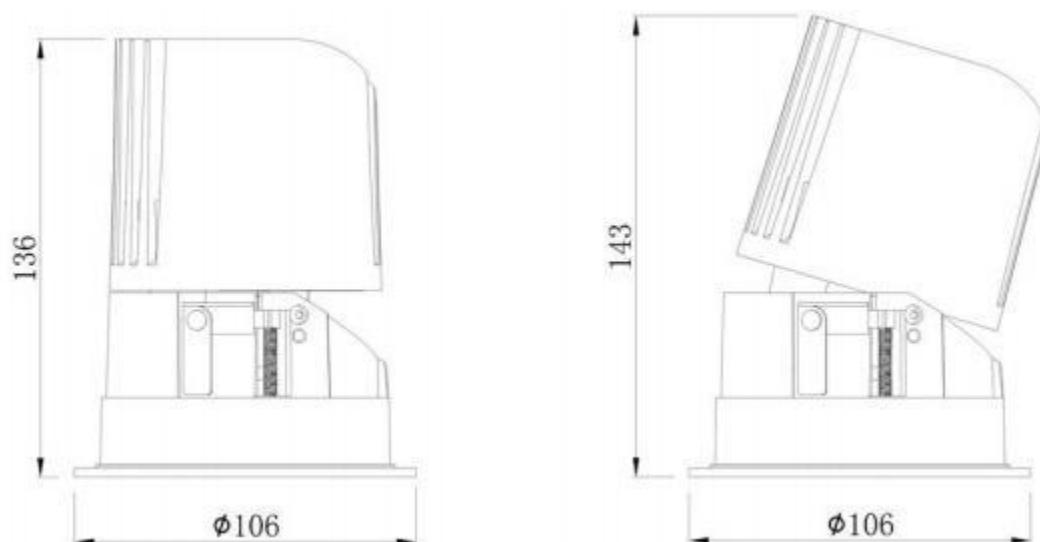

AL-AD95-25R

Product parameters :

Input voltage	220V AC	LED Brand	EVERCORE
Power	25W	MacAdam	SDCM≤5 step
Lumens	2000LM	IP Code	IP20
CCT	2700K/3000K/3500K/4000K	IK Class	/
CRI	≥90	Adjustable	Yes
Beam angles	15° 、 30° 、 45° 、 55°	Working temp	25°
Efficiency	80lm/w	Installation	Recessed
Housing	White (exterier) + Grey (cooling sink)	IES File	Yes
Dimmable	No Dimming	Lifetime(TM-21)	25000
Certificates	CE	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K/300 luminaires


Photoelectric parameters :

CCT	Lumens lm (25W)			
	15°	30°	45°	55°
2700K± 125K	1590	1895	1895	1800
3000K± 150K	1680	2000	2000	1900
4000K±250K	1805	2150	2150	2040

Remark :

- 1、the tolerance of out put data can be vary up to 10% ;
- 2、the output data is typical value.

AAI Figure

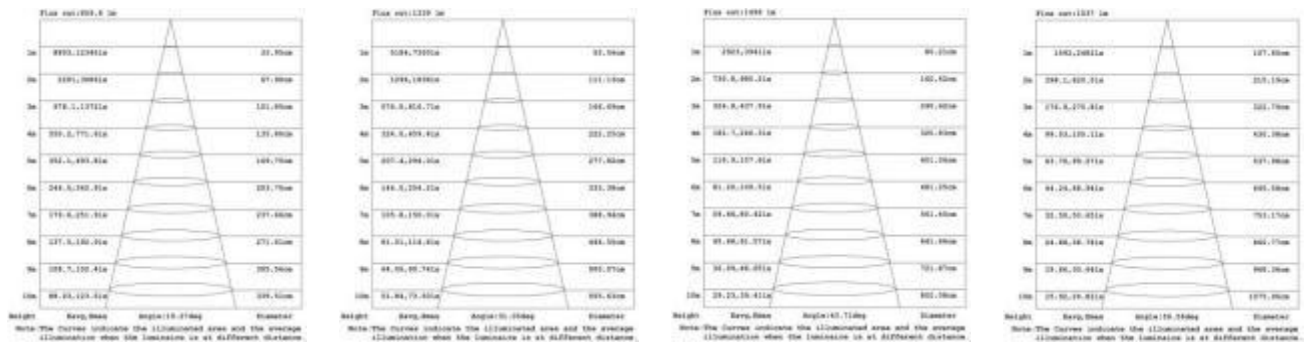


15°

30°

45°

55°

Luminous intensity distribution diagram

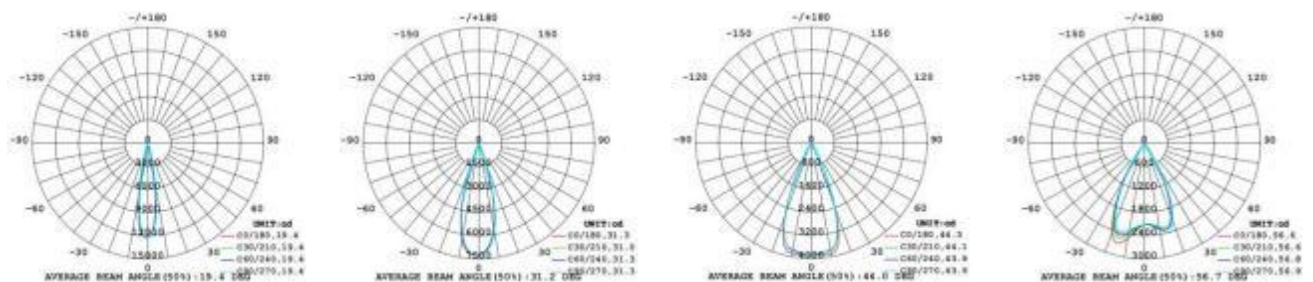

15°

30°

45°

55°