




Technical features

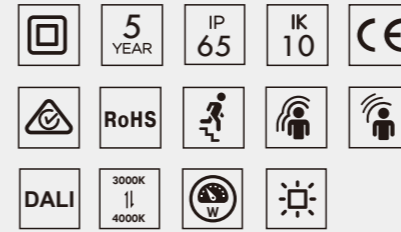


AURALED

Features

- 2CCT + multi-lumen
- UV-proof PC body and diffuser
- IK10, IP65, class II
- M20 entry holes on side and back
- Fit for BESA box and Nordic mounting
- PIR and microwave sensor optional
- LiFePO4 and Ni-Cd emergency optional
- 0-10V dim and DALI optional
- Aluminum ring optional

Unit: mm

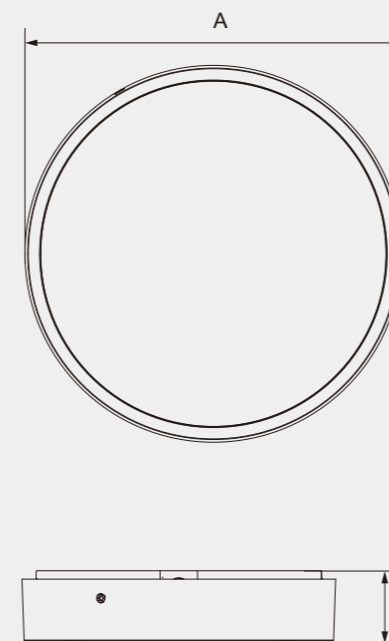

Code	Wattage	Lumen	A	B
AL-MABH15	15W	1500lm	302mm	67.5mm
AL-MABH25	25W	2500lm	352mm	67.5mm

Options	Finish
/M3: Emergency	/WH: White
/MS: Microwave Sensor /PIR	/BK: Black
/DALI	
/1-10V	

Colour Temperature	Construction	Accessory
/830: 2700K /840: 4000K /850: 5000K	Diffuser: Polycarbonate Trim: Polycarbonate Base: Polycarbonate	Plain Trim
/CCT: CCT Changeable		