




AURALEED


AL-NMS SIDE BEND NEON

AL-NMS0306	
Voltage:	24V
Max Wattage	8.3W/M
Max Lumen	170-260lm/m
Cut Points	37.5MM
IP Rating	IP54
CCT	27K, 3K, 4K, CCT (23-40k)
Dimensions	3X6MM SIDE BEND

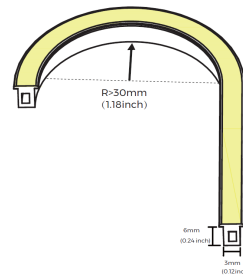


24V	IP65	2700k
3000k	4000k	CCT
IP54	>90 CRI	5 YEAR

AL-NMS0410	
Voltage:	24V
Max Wattage	7.9W/M
Max Lumen	220-270lm/m
Cut Points	41.6MM (CCT 31.25MM)
IP Rating	IP65
CCT	27K, 3K, 4K, CCT (23-40k)
Dimensions	4X10MM SIDE BEND

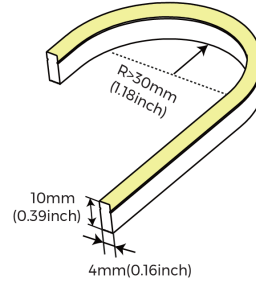


24V	IP65	2700k
3000k	4000k	CCT
>90 CRI	5 YEAR	

AL-NMS1010	
Voltage:	24V
Max Wattage	8W/M
Max Lumen	320-370lm/m
Cut Points	5.95MM
IP Rating	IP65
CCT	2700K, 3000K, 3500K, 4000K)
Dimensions	10X10MM SIDE BEND

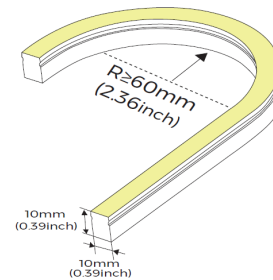


24V	IP65	2700k
3000k	3500k	4000k
>90 CRI	5 YEAR	

AL-NMS1217	
Voltage:	24V
Max Wattage	10.6W/M (WHITE) 13W/M (RGB) 16W/M (RGBW)
Max Lumen	410-520lm/m
Cut Points	50MM (WHITE) 83MM (RGB) 62.5MM (RGBW) 100MM (CCT)
IP Rating	IP65/IP67
CCT	2700K, 3000K, 4000K, RGB, RGB(3K/4K), CCT
Dimensions	12X17MM SIDE BEND

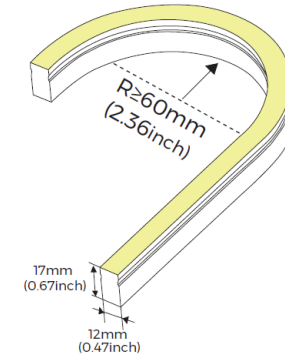


24V	IP65	IP67
2700k	3000k	4000k
RGB	3K 4K RGB	CCT
>90 CRI	5 YEAR	

AL-NM3D1515	
Voltage:	24V
Max Wattage	8W/M
Max Lumen	400-450lm/m
Cut Points	41.66MM
IP Rating	IP65/IP67
CCT	2700K, 3000K, 4000K)
Dimensions	15X15MM SIDE & TOP BEND

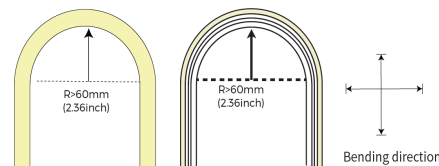

24V	IP65	IP67
2700k	3000k	4000k
>90 CRI	5 YEAR	

AL-36ONEON	
Voltage:	24V
Max Wattage	16W/M (WHITE) 11W/M (G,B) 16W/M (RGB, CCT)
Max Lumen	750-950lm/m
Cut Points	NOT ADVISED TO BE CUT
IP Rating	IP65
CCT	27K, 3K, 4K, RGB, CCT (23K-4K)
Dimensions	25X25MM SIDE & TOP BEND

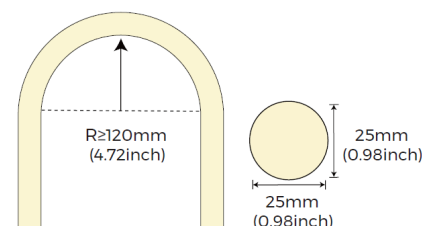

24V	IP65	>90 CRI
2700k	3000k	4000k
RGB	CCT	5 YEAR

WARRANTY: 5 YEARS

