


Linear Specification

AL-BE2507



【Basic Parameters】

- Material:AL6063-T5,spraying surface/anodizing
- Coating:Silver anodized(RAL9006),Black(RAL9005), White(RAL9003)
- Length:2500mm/0-2500mm customizable (Other lengths on request)
- Application: Indoor
- Installation:Recessed
- IP grade:IP20
- Certification:ROHS、 Reach
- Warranty:5 years




【Luminaire Parameters】

Version	Model	Length	Input Voltage (V)	Max. Current (A/m)	Type Power (W/m)	Max. Power (W/m)	CRI	CCT	Lumen (LM/m)
Regular	AL-BE2507	1000mm (3.28ft)	24	0.625 (0.19A/ft)	15 (4.57W/ft)	16.5 (5W/ft)	>90	2700K	960 (290LM/ft)
								3000K	1010 (310LM/ft)
								4000K	1050 (320LM/ft)
								6000K	1010 (310LM/ft)


Note:

1. The above parameters were tested based on TM standard products and D6280-24V-8mm light source ;
2. luminous flux is allowed to have a $\pm 10\%$ error range;
3. The above parameters are typical values.

[Optical Parameter]

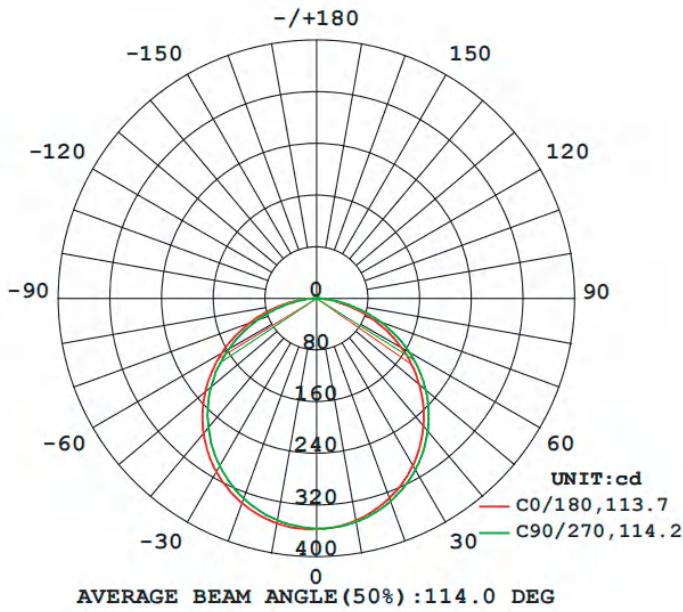

luminous intensity distribution diagram

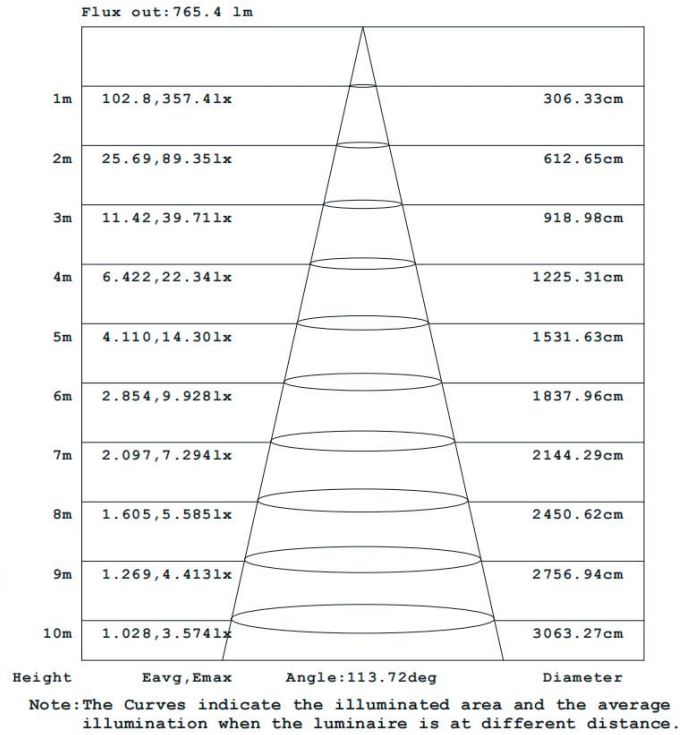

AAI Figure

[Application]

