


AL-LR1616



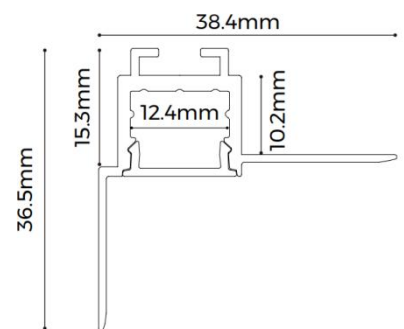


Features

- 16mm luminous surface, rimless recessed design, integrated into architecture.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting end cap design without screw, make installation more convenient.



Standard Configuration

| Picture | Item | Parameter | Model |
|---|----------|---|--------------|
|  | Profile | Profile weight: 0.78kg/2.5m Size: L2500*W38.4*H36.5mm Material: AL6063-T5 Surface processing: Anodizing | / |
|  | Cover | Type: Frosted diffuse Material: PC Light transmittance: 60% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C. | / |
|  | End caps | Size: L16*W13*H7mm Material: PC | AL-EC-LR1616 |

Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

