






Part No.	Description	Picture
----------	-------------	---------

2.02.WW.001	adjustable stainless steel holder can be turned around 180°	
-------------	---	--

1.01.07.0134	Stainless steel mounting clip	
1.01.05.0296 (M3*16mm)	Self-tapping screws	

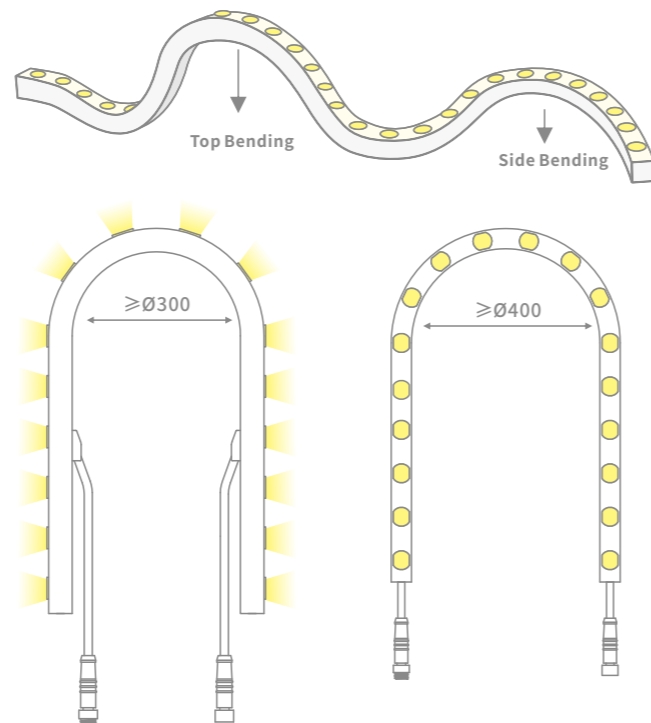

**AL-FP06MINI flexible wall washer**  
 IP rating: IP67  
 Input Voltage:24V DC  
 Power:12W/1.06m  
 Maximum 5.088 meters  
 Beam angle:25°/45°  
 Application: suit for commercial lighting, wall washing illumination  
 Installation:surface mounting  
 Working Temperature:-40°C~+45°C  
 Net Weight:286g/1.06meter  
 suit for class 2 power unit, maximum connected power not more than 100W

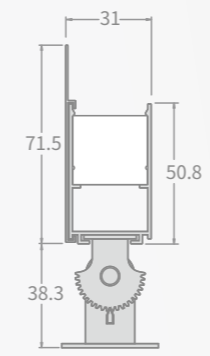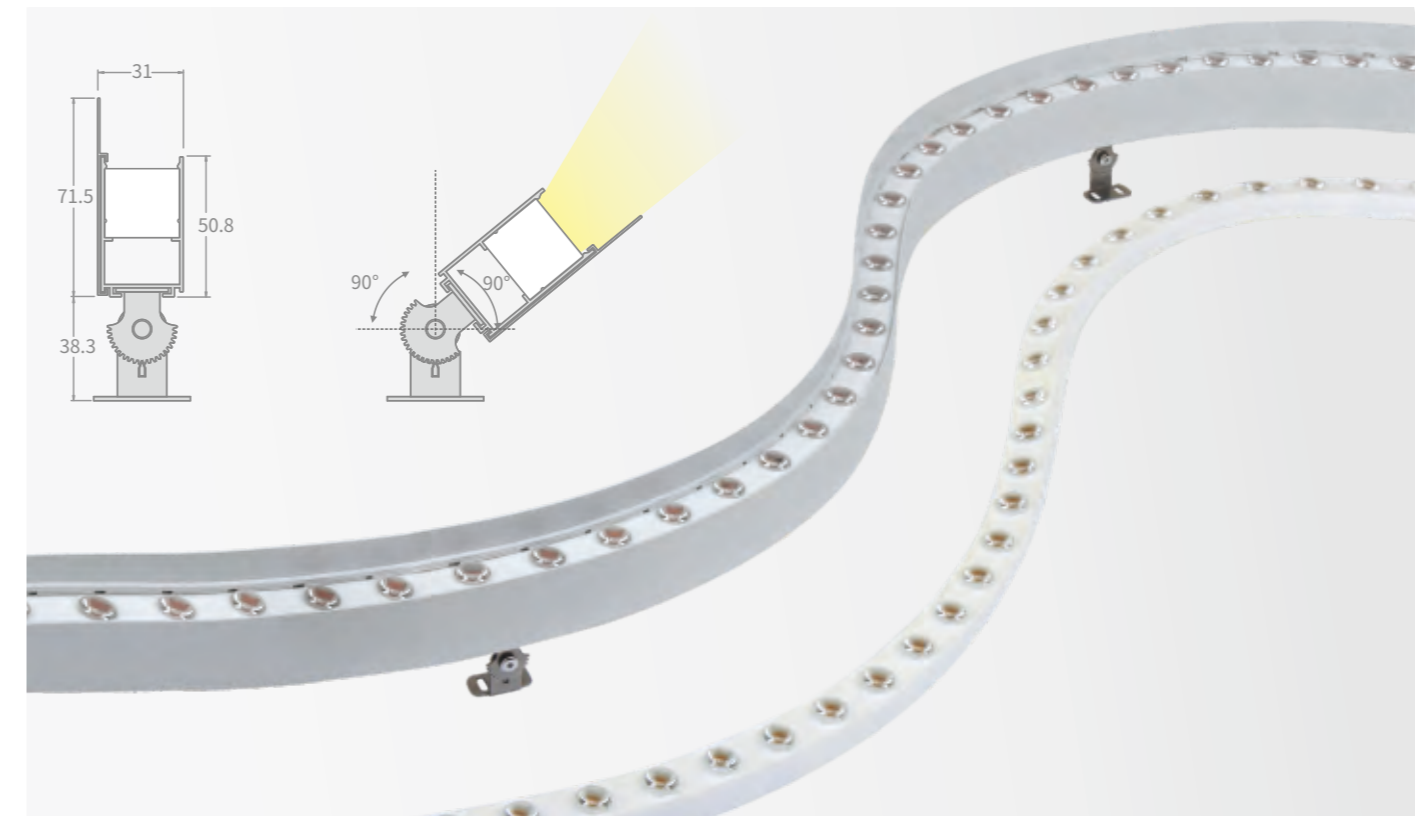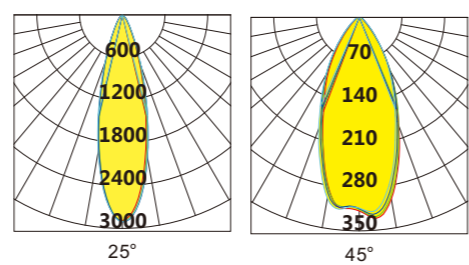


Part No.	Description	Picture
----------	-------------	---------

	Aluminum profiles that can be bent	
--	------------------------------------	--

	clip for aluminum profiles can be turned around 180°	
--	--	--

1.01.07.0139	Stainless steel mounting clip	
1.01.05.0296 (M3*16mm)	Self-tapping screws	

2.02.WW.002	adjustable stainless steel holder can be turned around 180°	
-------------	---	--

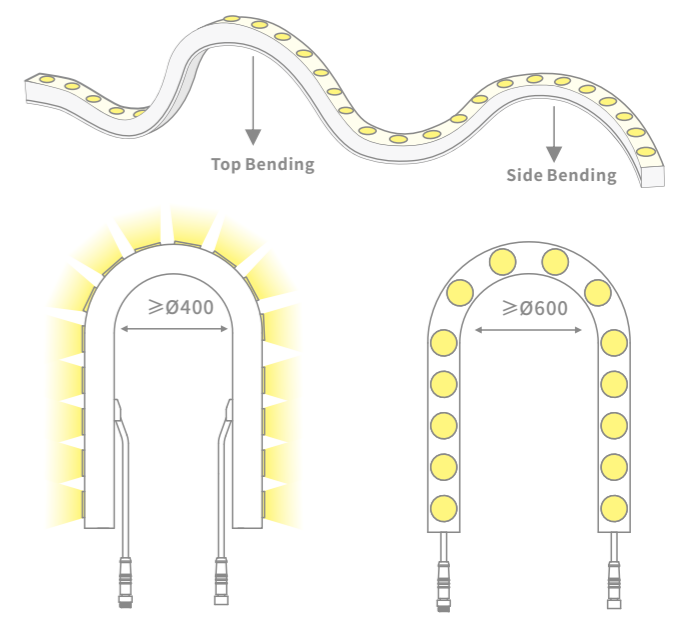

**AL-FP06-27 flexible wall washer**  
 IP rating: IP67  
 Input Voltage:24V DC  
 Power:23W/m  
 Maximum 4 meters  
 Beam angle: 15°/20°/30°/20°×40°/20°×50°  
 25°/40°/50°/25 X 45° (RGB/RGBW)  
 Application: suit for commercial lighting, wall washing illumination  
 Installation: surface mounting  
 Working Temperature:-40°C~+45  
 Net Weight:865g/meter  
 The above net weight does not include aluminum profiles.  
 suit for class 2 power unit, maximum connected power not more than 100W

