




Part No.	Description	Picture	Part No.	Description	Picture
1.05.035.0123 (1.2m)	Aluminum profile		1.05.035.0124 (1.2m)	Aluminum fixing holder	
			1.01.05.0030 (M3*16mm)	Self-tapping screws	
1.04.02.35.0026 (1.2m)	PC hyaline surface		1.01.04.35.0033 (Left)	End cap	
			1.01.04.35.0034 (right)		
1.01.06.0033	Rope system for hang up, 1.5 meter length (for hang up application)		1.09.04.0115	LED power supply Led Power supply to be purchased separately	
1.01.08.0157	Steel safety rope		2.02.LL.001	adjustable aluminum holder can be turned around 160°	
			1.01.06.0080	Waterproof Connectors	



Dimension: L1200*W35*H80mm
 (Customized length is available on request.)
 Input voltage:24V DC
 Power: 32W
 Beam Angle:15°/20°/18° × 45°/18° × 55°
 Color Temperature: 2700-6500K
 CRI: ≥90
 Working Temperature:-40°C~+45°C
 three in one dimming function
 (0/1-10V DC or PWM signal or resistance)
 Led Power supply to be purchased separately

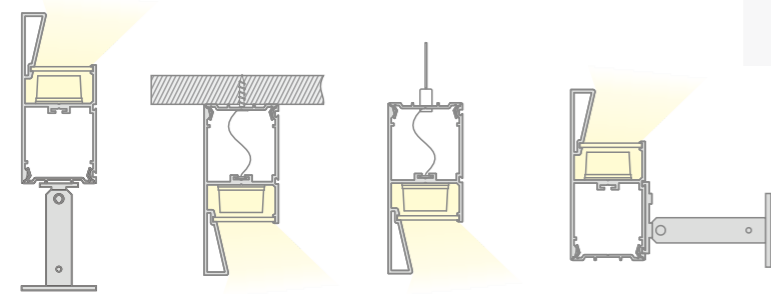