
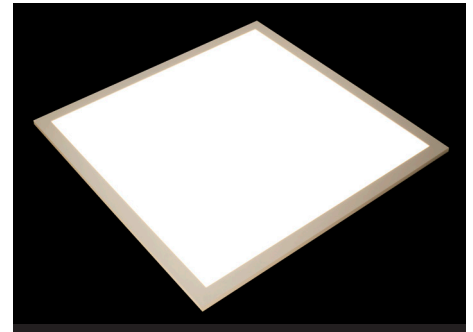


Specification	
Input Voltage (V)	220-240
Input Frequency (Hz)	50-60
Running Current	600/800/1100ma
CRI (Ra)	≥83
Life (H)	50,000 (L70/B50)
Operating Temperature (°c)	-25 to +45
IP Rating	IP40
Warranty (yrs)	5

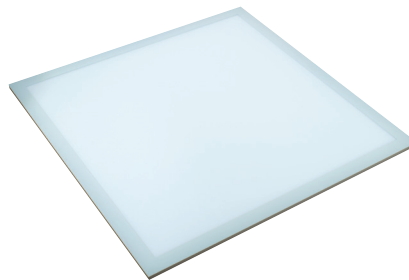

KEY FEATURES

- TP(a) Rated
- 105l/w
- Upto 70% of energy savings
- UGR >19
- Anti Glare Limiting Direct Glare from luminaires
- Slim aluminium edge frame
- Dimmable and Emergency Optional
- L70 50000 Hrs Lifetime

Physical Data	
Shape	SQUARE/RECTANGULAR
Colour	WHITE
Finish	ALUMINIUM WITH MICRO PRISM DIFFUSER

Ordering Information						
Model No	Power (W)	Lumen (lm)	Depth (mm)	Height (mm)	Width (mm)	Colour (K)
AL-PROM-24-4K (600X600)	24	2525	30.5	595	595	4000
AL-PROM-32-4K (600X600)	32	3358	30.5	595	595	4000
AL-PROM-45-4K (600X600)	45	4727	30.5	595	595	4000